

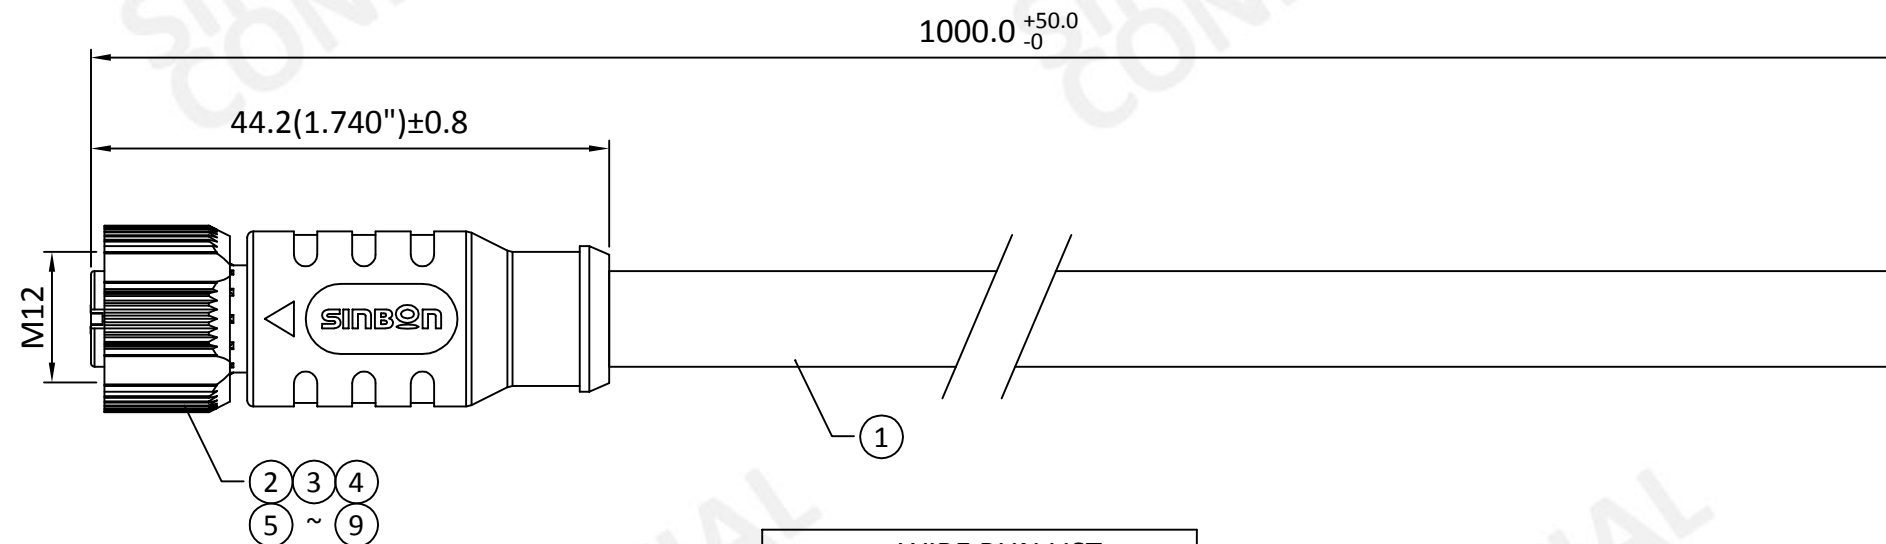



5		6		7		8	
REV.	ECN NO.	DATE	BY	DESCRIPTION			
1		Dec/26/2023	Edda Wan	RELEASED			



WIRE RUN LIST		
AWG	CONN 1	COLOR
24	1	BROWN
	2	WHITE
	3	BLUE
	4	BLACK
	5	GRAY

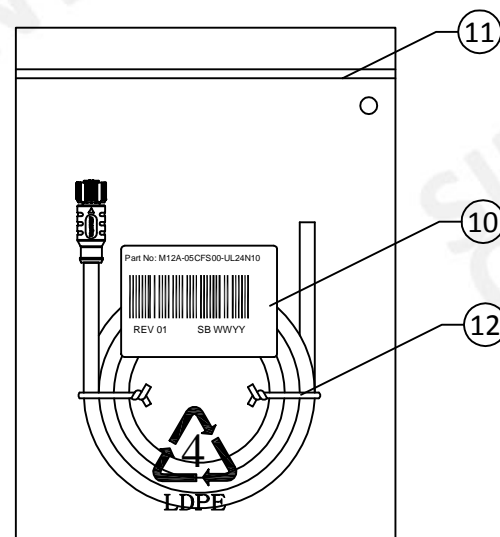

PACKING

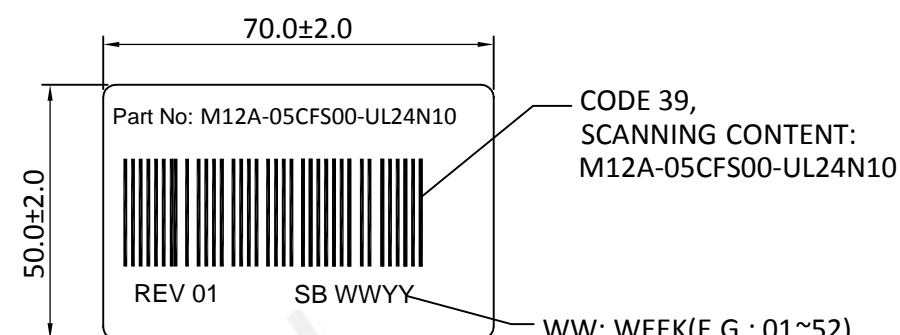

PACKING LABEL

CODE 39,
SCANNING CONTENT:
M12A-05CFS00-UL24N10

- WW: WEEK(E.G.: 01~52)
- YY: YEAR(E.G.: 00~99)

1. TEST FOR OPEN, SHORT, CONTINUITY BASED ON THE WIRE RUN LIST.


- MAX. COND. RESISTANCE: 3Ω
- MIN. INSUL. RESISTANCE: $100M\Omega$
- TESTING VOLTAGE: 300V DC

3. FOLLOW IPC620 CLASS II STANDARD TO ASSEMBLY AND INSPECTION.

4. RoHS COMPLIANCE (2011/65/EU & 2015/863/EU)

12.	A/R	CABLE,MINI TAPE,BLACK
11.	1	ZIPPER BAG,320*400*0.08
10.	1	BLANK LABEL,70*50
9.	A/R	PE,TRANS-CLEAR
8.	A/R	GLUE,N/A,BLACK BROWN,5-40℃,12MONTH
7.	A/R	GULE,N/A,TRANSLUCENT,5-40℃,6MONTH
6.	A/R	PU ADHESIVE,BROWN,EAST-GRACE
5.	A/R	PU ADHESIVE,BLACK,EAST-GRACE
4.	A/R	PLASTIC MASTERBATCH,BLACK,FOR TPU
3.	A/R	TPU, SHORE A 78P, NATURAL, HF
2.	1	I/O CONN.,F,5P
1.	A/R	CABLE, UL20549, #24*5C+AEB, OD=5.2
ITEM	QTY	DESCRIPTION

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE PROPERTY OF SINBON ELECTRONICS CO., LTD.
IT MAY NOT BE USED OR ITS CONTENTS COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT
AND IS TO BE RETURNED PROMPTLY UPON REQUEST BY SINBON ELECTRONICS CO., LTD.

CUSTOMER : SINBON Webshop			<div>SINBON</div> <div>SINBON Electronics Co., Ltd.</div>					
CUSTOMER P/N : M12A-05CFS00-UL24N10		REV. 01						
UNLESS OTHERWISE SPECIFIED TOLERANCE :			DRA. Dec/26/2023 Edda Wan		DESCRIPTION : 5P female pigtail anti-vibe IP67,1M			
1 ~ 10 : ±1 11 ~ 30 : ±2 31 ~ 50 : ±3 51 ~ 200 : ±5 201 ~ 400 : ±7 > 401 : ±10 ANGLES : ±1°			CHK. Dec/26/2023 Kevin Qiu					
			APR. Dec/26/2023 Kevin Qiu					
					SIZE A3	UNIT mm	SCALE NONE	SHEET 1 of 1